


AT A GLANCE

- Active Matrix TFT
- 15" viewable area
- Analog connector
- 200 Nits Brightness
- 11 lbs (including base)
- Plug and Play
- Carbon and Opal Colours

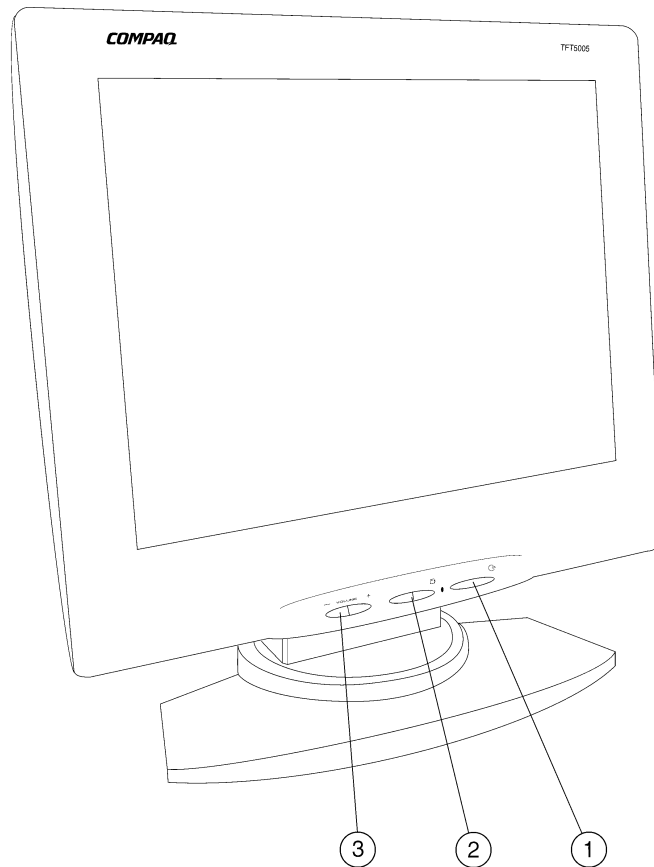

1. Power On/Off
2. Function
3. Automatic setup

SPECIFICATIONS *(continued)*

Flat Panel TFT5005 Colour Monitor

Note: AssetControl monitor. AssetControl features are accessible with Compaq desktops featuring Intelligent Manageability.

Factory Reset	Yes
AssetControl	Yes

Note: When used with Compaq Intelligent Manageability CPUs and appropriate network software.

Pixel Clock Speed	78.75 MHz maximum
Input Impedance	75 ohms $\pm 2\%$
Horizontal Frequency	24 to 61 kHz
Vertical Frequency	56 to 75 Hz
Power Consumption (Suspend/Standby)	5W Maximum
Power Supply ALS	Universal 100-240 VAC, 50-60 Hz
Maximum Power Rating	25 W
USB Capabilities	No
Synch Input	TTL separate synch
Signal Cable	15 pin d-sub, standard vga cable
Protective Panel	No
Detachable Base	Yes
Tilt feature	35° up, 5° down
Swivel	+/- 45°
Dimensions (HxWxD)	With base: 15.24 x 14.96 x 7.01 in/38.70 x 38.0 x 17.8 cm Without base: 14.96 x 12.99 x 2.17 in/38.0 x 33.0 x 5.5
Weight	With base: 11lbs / 5.0 kg Without base: 7.0lbs / 3.2kg
Temperature	
Operating	41° to 95°F/5° to 35°C
Non-operating	-4° to 140°F/-20° to 60°C
Humidity	
Operating	20% to 80%
Non-operating	5% to 95%
Warranty	Three-year parts, including backlight; first year, on-site labour

Note: Certain restrictions and exclusions apply. Consult the Compaq Customer Support Centre for details. In Canada consult the Product Information Centre at 1-800-567-1616.

COMPATIBILITY

The TFT5005 is compatible with all platforms using the VESA standard

* Features are subject to change without notice